OS2 LC/UPC-LC/UPC DUPLEX SINGLEMODE FIBRE OPTIC...


Fiber Optic Adapters

ARTICLE CODE WPC-FA0-LC0101

OS2 LC/UPC-LC/UPC Duplex singlemode fibre optic adapter, with plastic material housing in blue. Professional Line with zirconia ceramic alignment sleeve, IL ? 0.15 dB and RL ? 50 dB.

The LC/UPC-LC/UPC WP CABLING Professional Line fibre optic adapter is designed for professional installations requiring stable mating and low insertion loss.

The OS2 singlemode duplex configuration uses a plastic material housing and a zirconia ceramic alignment sleeve designed to promote precise ferrule alignment.

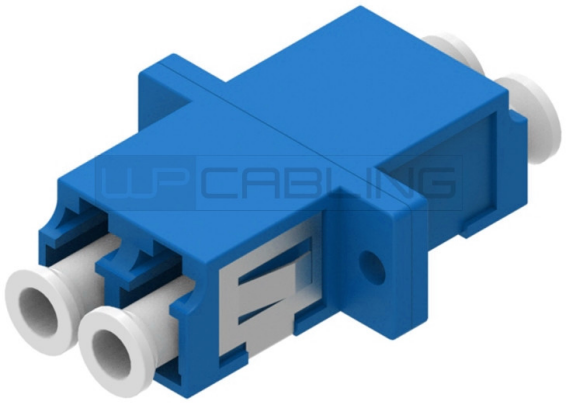

OS2
CATEGORY

LC Duplex
CONNECTOR TYPE A

Singlemode
FIBER TYPE

PROFESSIONAL TECHNICAL DATASHEET

Technical information

WPC-FA0-LC0101

Technical data

CATEGORY	OS2
CONNECTOR TYPE A	LC Duplex
CONNECTOR TYPE B	LC Duplex
FIBER TYPE	Singlemode

Applications

- Fibre optic patch panels
- ODFs and optical distribution systems
- Structured cabling

Main features

- Interface: LC/UPC-LC/UPC
- Configuration: Duplex
- Mode: singlemode
- Housing: plastic material
- Alignment sleeve: zirconia ceramic
- Insertion loss: ? 0.15 dB
- Return loss: ? 50 dB
- More than 500 mating cycles
- Operating temperature: -25 °C / +70 °C
- Benefits:
- Precise ferrule alignment
- Low insertion loss

PRODUCT IDENTIFICATION

Code: WPC-FA0-LC0101

EAN: 8054392615726

ONLINE PRODUCT PAGE

Scan the QR code

Main features

- Stable mating over time